


Notes
Aluminum profiles are supplied in 6000 mm lengths.
Accessories are required to compensate for the difference in thickness between the sandwich panel and the polycarbonate panel.

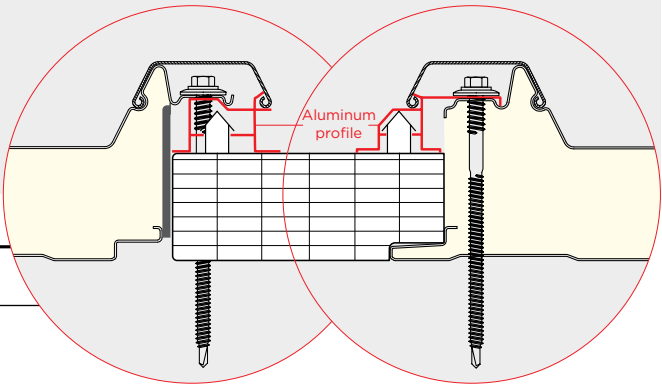

Designation	Toplight Cap.
Description	Glass honeycomb flashing panel, designed for roofing systems.
Application	Industrial roofs and skylights.
Dimensions	Thicknesses: 40 mm Waves interval: ~1000 mm Width modular: 1000 mm ±5 mm Length: 13500 mm (max.)
Performance	Thermal transmittance: 1.1 W/m² °C Light transmittance: ~35% Temperature variation: -40/+120 °C Reaction to fire: B-s1,d0 EN 13501-1 UV protection: yes
Installation	Important information at www.ofelizpainel.com